
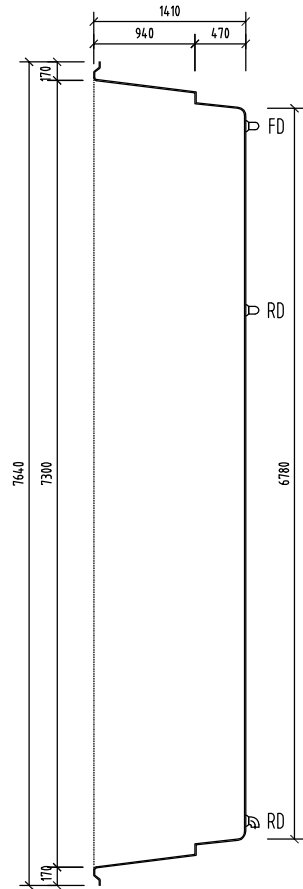



POHĽAD ZHORA M 1:50


TOP ELEVATION
OBERANSICHT

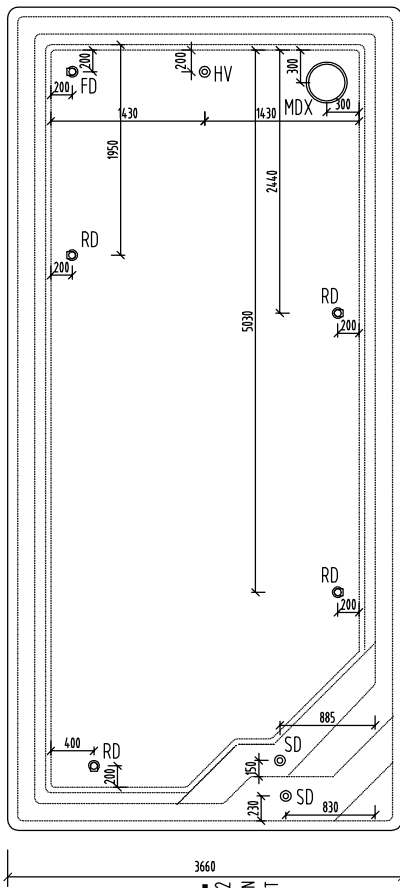

REZ 2-2 M 1:50
LONGITUDINAL SECTION
QUERSCHNITT

REZ 1-1 M 1:50

CROSS SECTION
QUERSCHNITT

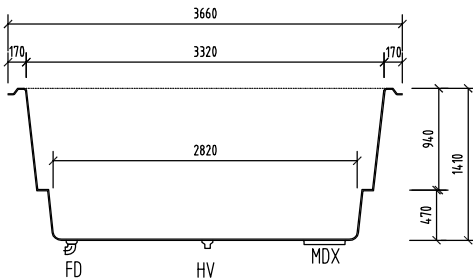

- MDX - DNOVÁ VÝPUSŤ / BOTTOM OUTLET / BODENAUSLAUF 1x
- HV - HYDROSTATICKÝ VENTIL / HYDROSTATIC VALVE / HYDROSTATISCHE VENTIL 1x
- FD - FIXNÁ DÝZA / FIXED NOZZLE / FESTEN DUSE 1x
- RD - ROTAČNÁ DÝZA / ROTATED NOZZLE / ROTATION DUSE 4x
- SD - SCHODOVÁ DÝZA / STAIR NOZZLE / TREPPE DUSE 2x

POZNÁMKA / NOTE / ANMERKUNG :


HRÚBKÁ STENY BAZÉNA JE CCA. 10 MM
TOLERANCIA PRESNOSTI 7 - 10 MM

THICKNESS OF THE SIDEWALL OF SWIMMING POOL IS APX. 10 MM.
MEASURED WITH TOLERANCE RATE 7 - 10 MM

DIE SCHWIMMBADWAND DÜCKE IS CA. 10 MM.
DÜCKENTOLERANZ IST 7 - 10 MM.

NÁZOV VÝKRESU / TECHNOLOGISCHE HOLES / ZEICHNUNG NAME:-

BRILIANT 74
TECHNOLOGICKÉ PRESTUPY
TECHNOLOGICAL HOLES
VENTAGE VERSION
TECHNOLOGISCHE HOLES
VENTAGE VERSION

Compass 
Ceramic Pools Europe
www.compasspools.eu

KRESLIL: ING. PETER KALETA	DÁTUM: 12/2013
DRAWER / ZEICHNER:	DATE / DATUM:
MIERKA: SCALE/MASSTABE: 1:50	FORMÁT: DRAWING FORMAT / ZEICHNUNG FORMAT: A3
VERZIA: VERSION: 4	ČÍSLO: DRAWING NUMBER: 3