
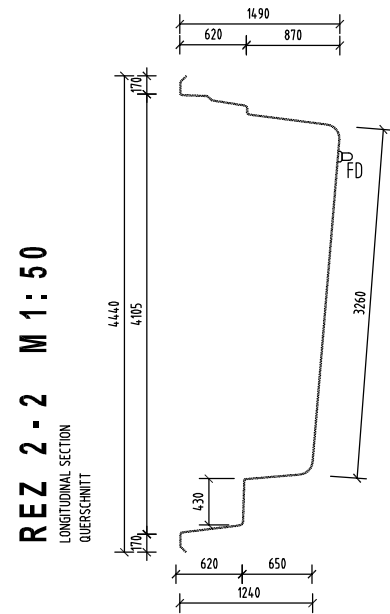



POHLAD ZHORA M 1:50

TOP ELEVATION
OBERANSICHT

SCALE
MASSTABE

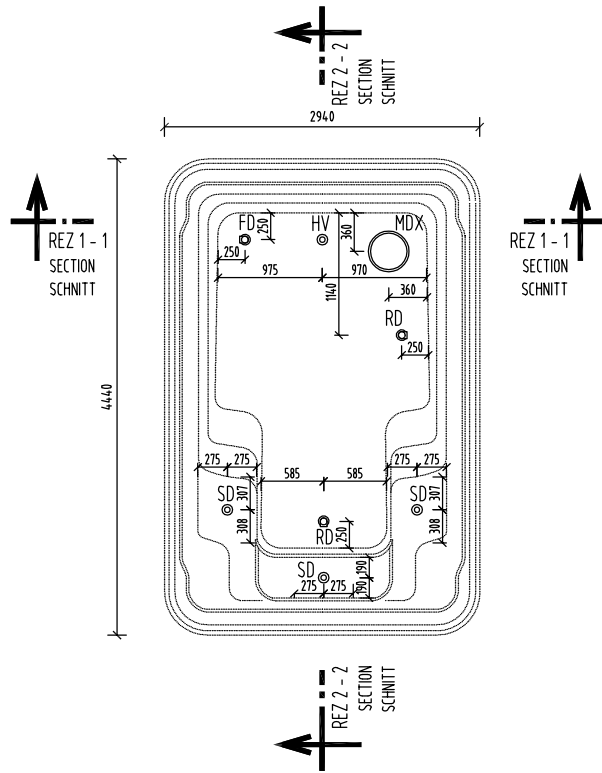

REZ 1-1 M 1:50

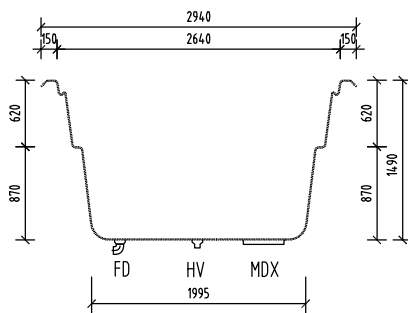

- MDX - DNOVÁ VÝPUSŤ / BOTTOM OUTLET / BODENAUSLAUF 1x
- HV - HYDROSTATICKÝ VENTIL / HYDROSTATIC VALVE / HYDROSTATISCHE VENTIL 1x
- FD - FIXNÁ DÝŽA / FIXED NOZZLE / FESTEN DUSE 1x
- RD - ROTAČNÁ DÝŽA / ROTATED NOZZLE / ROTATION DUSE 2x
- SD - SCHODOVÁ DÝŽA / STAIR NOZZLE / TREPPE DUSE 3x

POZNÁMKA / NOTE / ANMERKUNG :


HRÚBKA STENY BAZÉNA JE CCA. 10 MM
TOLERANCIA PRESNOSTI 7 - 10 MM

THICKNESS OF THE SIDEWALL OF SWIMMING POOL IS APX. 10 MM.
MEASURED WITH TOLERANCE RATE 7 - 10 MM

DIE SCHWIMMBADWAND DÜCKE IS CA. 10 MM.
DUCKENTOLERANZ IST 7 - 10 MM.

NÁZOV VÝKRESU / TECHNOLOGISCHE HOLES / ZEICHNUNG NAME:-

X-TRAINER 45
TECHNOLOGICKÉ PRESTUPY
TECHNOLOGICAL HOLES
VENTAGE VERSION
TECHNOLOGISCHE HOLES
VENTAGE VERSION

Compass 
Ceramic Pools Europe
www.compasspools.eu

KRESIL / DRAWER / ZEICHNER:-	ING. PETER KALETA	DÁTUM / DATE / DATUM:-	12/2013
MIERKA / SCALE / MASSTABE:-	1:50	FORMÁT / DRAWING FORMAT / ZEICHNUNG FORMAT:-	A3
VERZIA / VERSION:-	3	ČÍSLO / DRAWING NUMBER / ZEICHNUNG NUMBER:-	4